

Melixon-S



①



②




③



④



140
kg

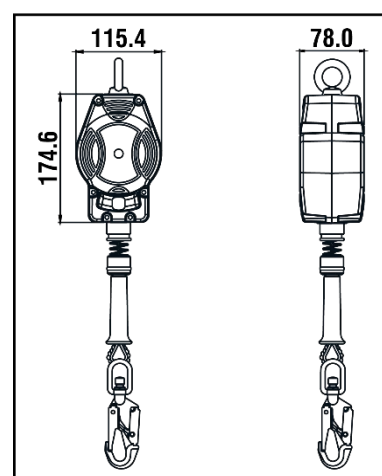

HS CODE
84798997
CARTON SIZE / PCS.
60 x 40 x 24 cm / 7
AET N°PPE-3463-24135-Cert
ANCCP Certification Agency S.r.l. N°0302 Via dello Struggino, 6 57121 LIVORNO (LI) - Italy
MODULE D FI14/14003.12
SGS Fimko Oy, N°0598 Takomotie 8, 380 HELSINKI, Finland

REF.	FA 20 402 03
 LG. KG	3,50 m ----- 140 KG
	EN 360:2023
 MAT.	Polyamide 6 - 30% fiber glass  STEEL Ø 4.8 mm
	 FA 50 225 23B / FA 50 203 20 with fall indicator
 360°	x2
R(kN)	12 kN
	YES
+	PPE-R 11.060
	3.13 KG

 LG. KG	 MAT.	
Longueur Poids maxi utilisateur Length Max. user weight Longitud Peso máximo del usuario Lunghezza Peso Max. dell'utente Länge Höchstgewicht des Benutzers	Matière carter / câble Material of casing / wire rope Material cárter / cable Material dei carter / cavo Material Gehäuse / Seil	Matière connecteur haut / connecteur bas Material of top connector / bottom connector Material conector alto / conector bajo Materiale connettore alto / connettore basso Material oberes / unteres Verbindungselement
 360°		PPE-R/11.060
Nombre d'émerillons Number of swivels Cantidad de eslabones giratorios Numero di tornichetti Anzahl der Wirbel	Homologué pour le travail à proximité d'arêtes vives Approved for work near sharp edges Homologado para trabajo cerca de aristas vivas Omologato per lavoro in prossimità di spigoli vivi Zugelassen für Arbeiten in der Nähe scharfer Kanten	