


HOPÉ



FA 30 600 10


FA 30 600 15

FA 30 600 20



140kg

FA 30 600 13

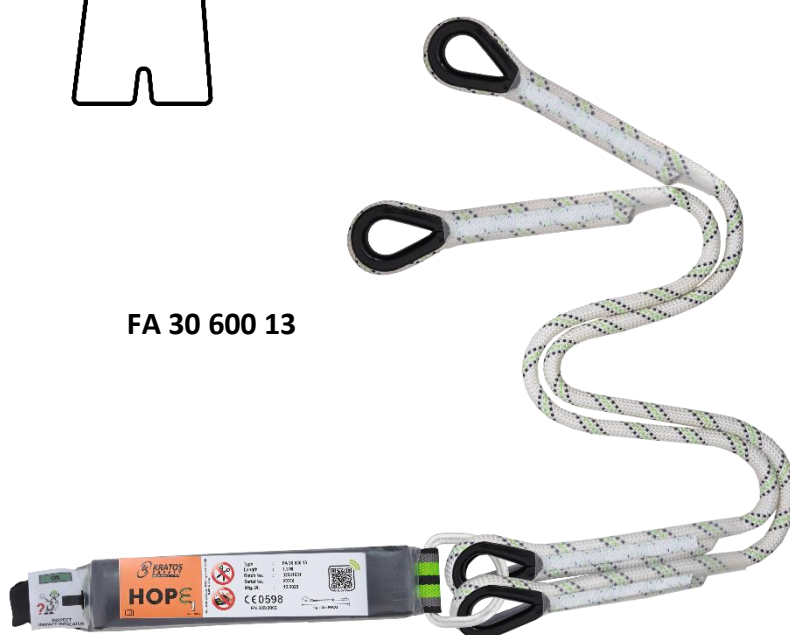

①

HS CODE
63079098
CARTON SIZE / PCS.
60 x 40 x 24 cm / 12
AET N°PPE-3468-24138-Cert
ANCCP Certification Agency S.r.l. N°0302 Via dello Struggino, 6 57121 LIVORNO (LI) - Italy
MODULE D FI14/14003.12
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 30 600 13	FA 30 600 10	FA 30 600 15	FA 30 600 20
LG.  KG	1.3 m	1 m (connectors included)	1.5 m (connectors included)	2.0 m (connectors included)
Max. 140 KG				
CE	EN 355:2002			
MAT.	 PA 11 mm			
	45 mm			
				
	NO			
+	PPE-R 11.063			
	0.77 KG	1.60 KG	1.82 KG	2.04 KG



Largeur de l'absorbeur d'énergie
 Width of the energy absorber
Ancho del absorbedor de energía
 Larghezza del assorbitore di energia
Breite des Falldämpfers
LG.



Longueur Poids maxi utilisateur
Length Max. user weight
Longitud Peso máximo del usuario
Lunghezza Peso Max. dell'utente
Länge Höchstgewicht des Benutzers



Matière connecteur haut / connecteur bas
 Material of top connector / bottom connector
Material conector alto / conector bajo
 Materiale connettore alto / connettore basso
Material oberes / unteres Verbindungselement



Ouverture
 Gate opening
Apertura
 Apertura
Öffnung



Utilisation horizontale (à proximité d'arêtes vives)
 Horizontal use (near sharp edges)
Uso horizontal (cerca de aristas vivas)
 Utilizzo orizzontale (in prossimità di spigoli vivi)
Horizontale Verwendung (in der Nähe scharfer Kanten)