






FA 60 107 00


P. 1 | 2



EASYSAFEWAY 3

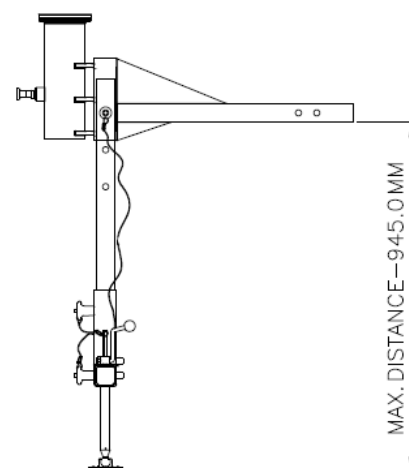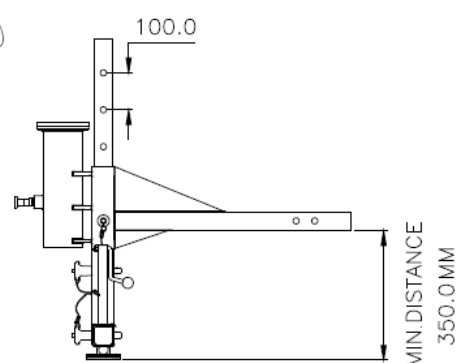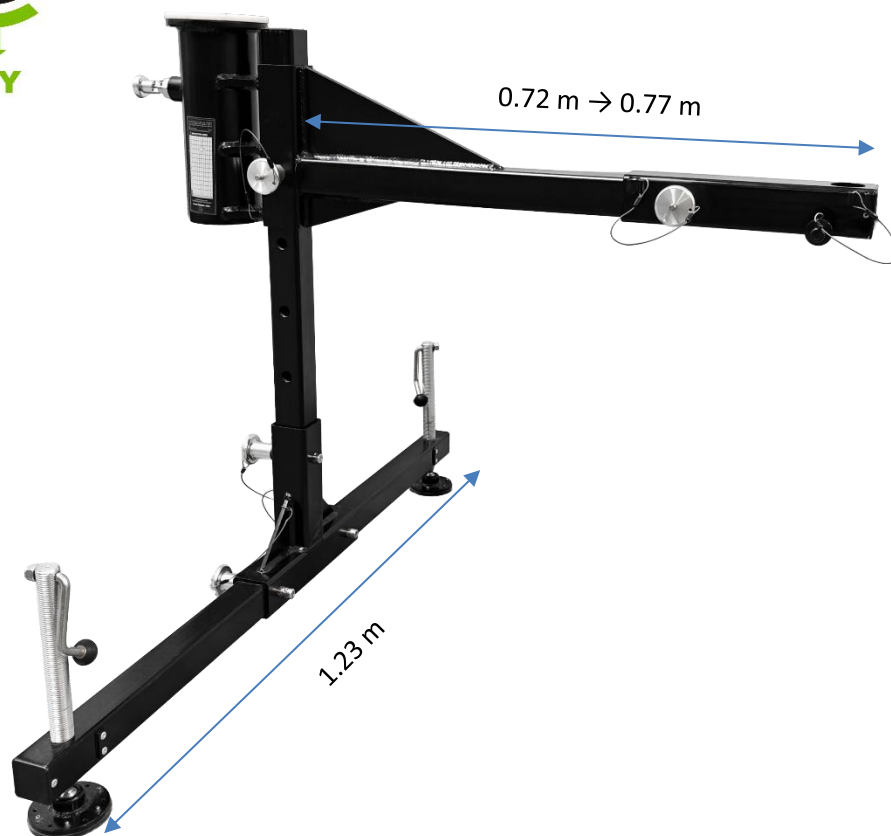

HS CODE
73269098
CARTON SIZE / PCS.
144 x 67 x 40 cm / 1
AET (UE) N°2927/1917/160/12/25/0107
QUINTIN CERTIFICATIONS N°2927 825 route de Romans 38160 Saint Antoine l'Abbaye – FRANCE
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 107 00
	EN 795:2012 Type B, TS 16415:2013 Type B
	x2
MAT.	
R (kN) / MBS (kN)	13 kN / 15 kN
	Tow hitch Ø 51 mm / 2"
+	FA 60 105 03, FA 60 105 04, FA 60 105 05
	29.72 KG




Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Charge maxi admissible
Max. allowable load
Carga máxima admisible
Peso maximale
Zulässige Höchstlast

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength (kN) / Minimum Breaking Strength (kN)
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Dimensions de la structure d'accueil
Dimensions of the receiving structure
Dimensiones de la estructura receptora
Dimensioni della struttura ospitante
Abmessungen der Aufnahmestruktur

+

À utiliser avec
To be used with
Para usar con
Ad essere utilizzato con
Verwendet werden soll mit