

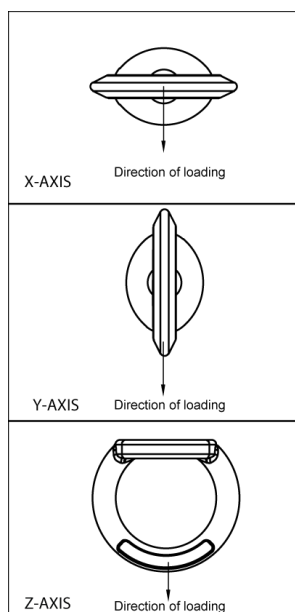
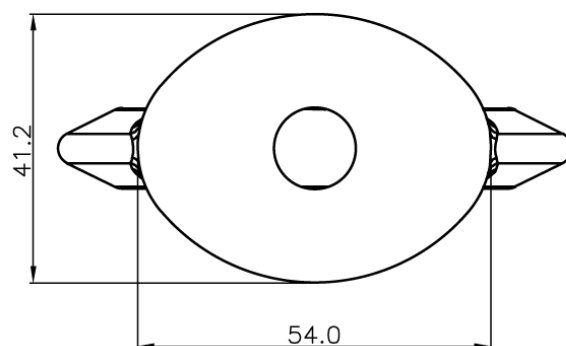


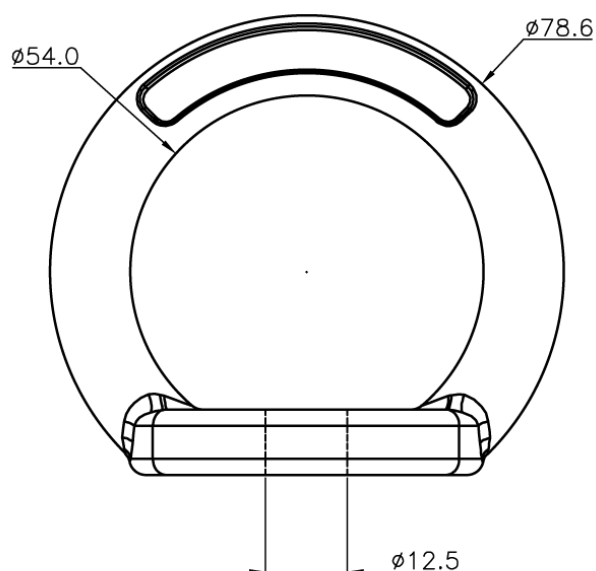

FA 60 014 00, FA 60 014 01

P. 1|2



HS CODE
73269098
CARTON SIZE / PCS.
400 x 300 x 150 mm / 24
Certification of Conformity N°PPE-24232-AC-505
ANCCP CERTIFICATION AGENCY srl Via dello Struggino, 6 57121 Livorno (LI) – Italia

REF.	FA 60 201 04
CE	EN 795:2012 Type A TS 16415:2013 Type A
	x4
MAT.	 INOX316
DIM.	41.2 x 54 mm
R (kN) / MBS (kN)	15 kN / 23 kN
	1 x M12
	0.22 KG
Sys.	☒ KS 4000 ☒ KS 4000 MAX-S



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Fixations à utiliser
Fasteners to use
Fijaciones que deben usarse
Elementi di fissaggio da utilizzare
Zu verwendende Befestigungen