





# Dielectri

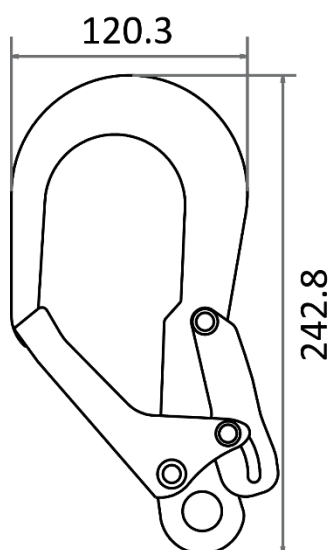

REF.	FA 50 222 55
CE	EN 362:2004 Class T
	23 kN / 57 mm
MAT.	P/STEEL
	DOUBLE ACTION
KEYLOCK	---
+	MAX. DIELECTRIC RESISTANCE = 14KV
	0.56 KG


**MAT.**


**Résistance à la rupture / Ouverture**  
Breaking strength / Gate opening  
**Resistencia a la ruptura / Apertura**  
Resistenza alla rottura / Apertura  
**Bruchfestigkeit / Öffnung**

**Matière**  
Material  
**Material**  
Materia  
**Material**

**Type d'ouverture**  
Opening system  
**Tipo de apertura**  
Sistema di apertura  
**Öffnungssystem**

<b>HS CODE</b>
73269098
<b>CARTON SIZE / PCS.</b>
40x30x19/25
<b>AET (EU) N°2777/10741-01/E01-01</b>
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D FI14/14003.01</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland
<b>AET (UKCA) N°AB0321/16044-01/E01-01</b>
<b>Satra Technology Centre, N°0321</b> Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
<b>MODULE D 11 IN14/14003</b>
<b>SGS United Kingdom Ltd., N°0120</b> Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom