




# FA 40 906 50 – FA 40 906 100



**FA 40 906 50**




**EN 358 + EN 795 Type B + EN 795 Type C**

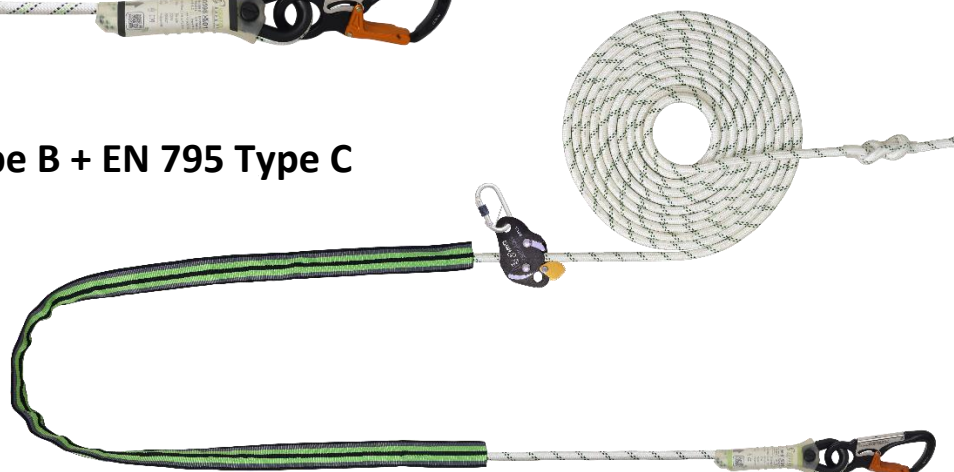


**FA 40 906 100 (10 m)**



**EN 358:2018**

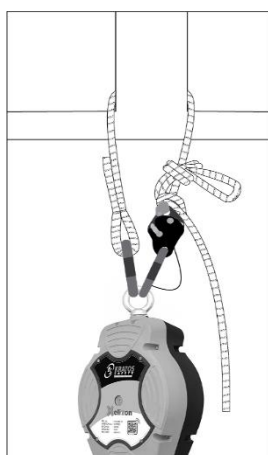



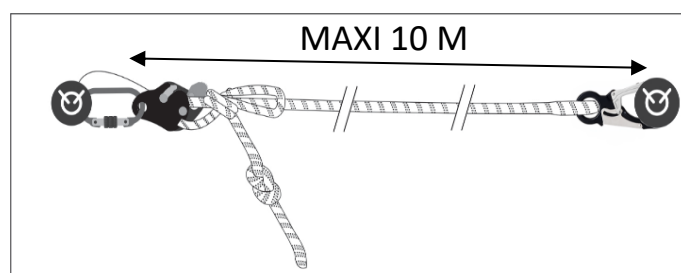





**EN 795:2012 Type B**



**EN 795:2012 Type C**

HS CODE
56090000
CARTON SIZE / PCS.
40 x 40 x 24 cm / 12
AET (UE) N°2777/21926-01/E00-00
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 40 906 50   FA 40 906 100	
CE	EN 358:2018, EN 795:2012 Type B & C	
LG.	1.6 m / 5.0 m   1.6 m / 10.0 m	
MAT.	 PA 12 mm Polyamide	
		
MAT. 		
	0.75 KG   1.60 KG	

MAT.		MAT. 
<b>Matière</b>	<b>Matière connecteurs</b>	<b>Matière boucle de réglage / coulisseau</b>
Material	Material of connectors	Material of adjustment buckle / rope grab
<b>Material</b>	<b>Material de los conectores</b>	<b>Material de hebilla de ajuste / corredera</b>
Materia	Materie connettori	Materia fibbia di regolazione / anticaduta scorrevole
<b>Material</b>	<b>Material der Verbinder</b>	<b>Material der Einstellschnalle/des Gleitelements</b>