




ZONE 1

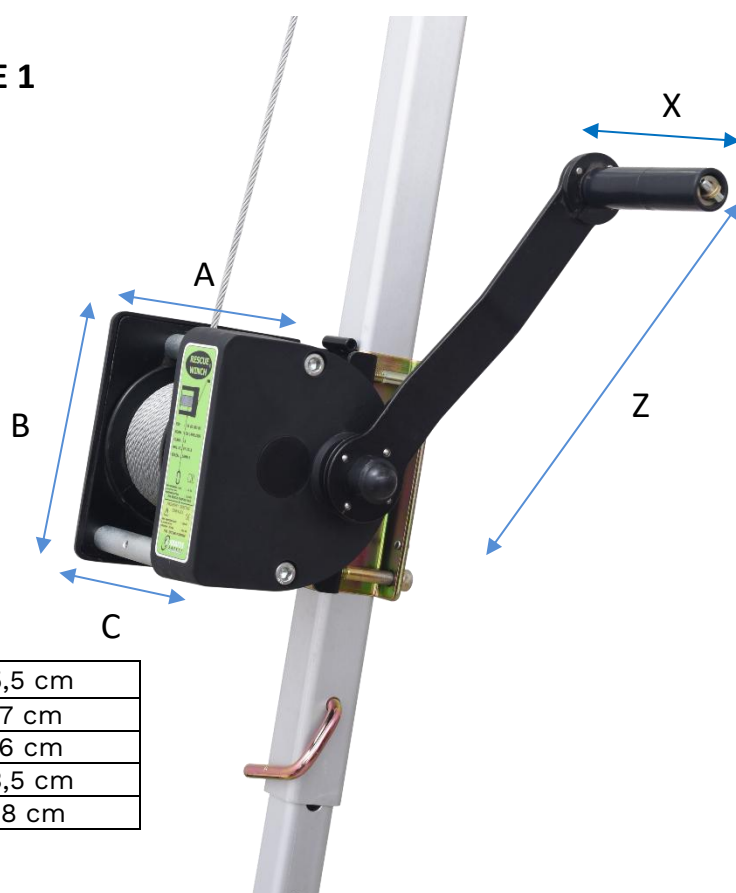


A	15,5 cm
B	17 cm
C	16 cm
X	13,5 cm
Y	28 cm

 FA 60 003 20
 FA 60 003 20S


+ FA 60 105 00


 + FA 60 001 00 / FA 60 002 00
 + FA 60 101 00 / FA 60 102 00


+ FA 60 022 00

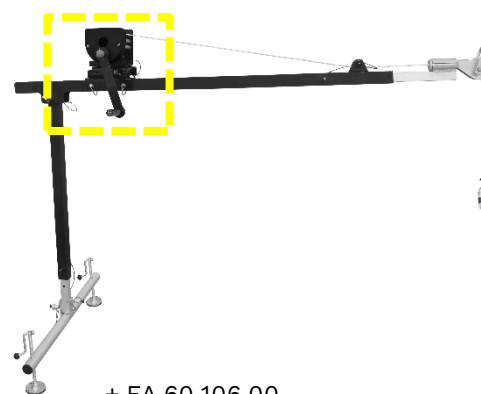

+ FA 60 106 00

HS CODE
84253900
CARTON SIZE / PCS.
40 x 30 x 20 cm /1
Certificate of Test
n°SPC0256516/1716 Issue 2 Ext. 1
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom

REF.	FA 60 003 20 FA 60 003 20S	
LG.	20 m	
CE	EN 1496:2017 Class A	
	x1	
	135 KG	
MAT. 	 STEEL Ø 4.8 mm	 INOX Ø 4.8 mm
MAT. 	 STEEL	 INOX
(1) EN 13157 + A1 (1) Machinery Directive: 250 KG (1) ATEX Directive:  II2 G Exh IIC T6 Gb EN 80079-36:2016 EN 80079-37:2016 + (2) Compatible FA 60 001 00, FA 60 002 00 (2) Compatible FA 60 101 00, FA 60 102 00, in combination with FA 60 101 02 (2) Compatible FA 60 022 00, in combination with FA 60 022 06 (2) Compatible FA 60 105 00, in combination with FA 60 105 02 (2) Compatible FA 60 106 00, in combination with FA 60 106 02		
	7.54 KG	7.73 KG



Nombre d'utilisateurs
 Number of users
 Cantidad de usuarios
 Quantità di utilizzatori
 Anzahl der Benutzer




Charge maxi admissible
 Max. allowed load
 Carga máxima admisible
 Carico massimale ammissibile
 Zulässige Höchstlast



Matière câble
 Material wire rope
 Material cable
 Material dei cavo
 Material Seil

+



(1)
 Point fort
 Key feature
 Ventaja principal
 Punti forti
 Produktvorteil

(2)
 À utiliser avec
 To be used with
 Para usar con
 Ad essere utilizzato con
 Verwendet werden soll mit

Matière connecteur
 Material of connector
 Material conector
 Materiale connettore
 Material Verbindungselement