



FA 60 040 00

P. 1 | 2



CROSSLOOP



250 mm

+


500 mm

+






750 mm

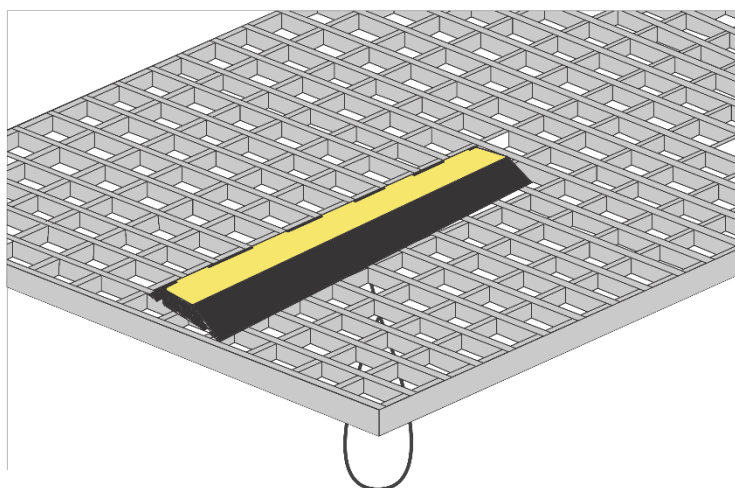

8,5 m




HS CODE
73269098
CARTON SIZE / PCS.
60x40x24 cm / 8
AET (UE) N° 2777/15874-01/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 040 00
CE	EN 795:2012 Type B
	x1
MAT.	PA /  STEEL /  ALU
DIM.	500 x 200 mm
R (kN) / MBS (kN)	12 kN / 15 kN
	---
+	Delivered with a 8.5 m cord
	3.75 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Dimensions de la structure d'accueil
Dimensions of the receiving structure
Dimensiones de la estructura receptora
Dimensioni della struttura ospitante
Abmessungen der Aufnahmestruktur

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

+

Point fort
Key feature
Ventaja principal
Punti forti
Produktvorteil