

**gravity-s**

140  
kg



**ALU**




①



Fall indicator + Swivel



②

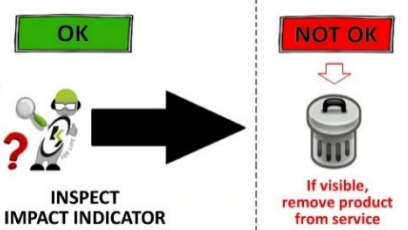

③



HS CODE

63079098

CARTON SIZE / PCS.










80 x 40 x 24 cm / 10

AET N°2777/10960-02/E01-01

**Satra Technology Europe Ltd., N° 2777,**  
 Bracetown Business Park, Clonee,  
 Dublin, D15YN2P, Ireland

MODULE D FI14/14003.02

**SGS Fimko Oy, N°0598**  
 Takomotie 8,  
 00380 HELSINKI, Finland

|   |  |
|---|--|
| REF.  | FA 30 822 15   |
| LG.<br>(MIN./MAX.)<br> | 1.2 m / 1.5 m (connectors included)<br>-----<br>Max. 140 KG  |
| CE  | EN 355:2002  |
| MAT.  |  30 mm<br> PES |
|                        | 45 mm  |
|                        | <br>FA 50 221 17 / FA 50 227 60  |
|                       | YES  |
| +   | VG 11.063<br> x3  |
|                      | 1.86 KG  |



Largeur de l'absorbeur d'énergie  
Width of the energy absorber  
Ancho del absorbedor de energía  
Larghezza del assorbitore di energia  
Breite des Falldämpfers

LG.



Longueur Poids maxi utilisateur  
Length Max. user weight  
Longitud Peso máximo del usuario  
Lunghezza Peso Max. dell'utente  
Länge Höchstgewicht des Benutzers



Matière connecteur haut / connecteur bas  
Material of top connector / bottom connector  
Material conector alto / conector bajo  
Materiale connettore alto / connettore basso  
Material oberes / unteres Verbindungselement



Ouverture  
Gate opening  
Apertura  
Apertura  
Öffnung



Homologué pour le travail à proximité d'arêtes vives  
Approved for work near sharp edges  
Homologado para trabajo cerca de aristas vivas  
Omologato per lavoro in prossimità di spigoli vivi  
Zugelassen für Arbeiten in der Nähe scharfer Kanten