



FA 60 046 00

P. 1 | 2



# SKY GRAB



SET OF 4 COMPONENTS




① FA 60 046 01



②

FA 50 301 23B  
x 2

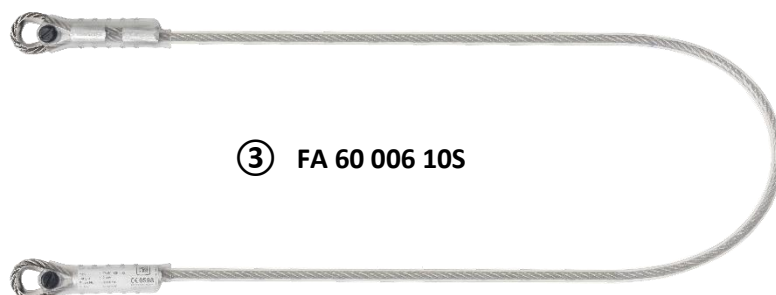

③ FA 60 006 10S



| HS CODE                                                                                                       |
|---------------------------------------------------------------------------------------------------------------|
| 63079098                                                                                                      |
| CARTON SIZE / PCS.                                                                                            |
| As per order quantity                                                                                         |
| FA 50 301 23B: AET (UE) N° 2777/10347-02/E03-01                                                               |
| FA 60 006 10S: AET (UE) N°2777/10792-04/E01-01                                                                |
| FA 60 046 01: AET (UE) N° 2777/10788-04/E02-01                                                                |
| <b>Satra Technology Europe Ltd., N° 2777,</b><br>Bracetown Business Park, Clonee,<br>Dublin, D15YN2P, Ireland |
| MODULE D FI14/14003.01                                                                                        |
| <b>SGS Fimko Oy, N°0598</b><br>Takomotie 8,<br>00380 HELSINKI, Finland                                        |

|                                                                                   |                                                                                                                         |                                                                                                                 |                                                                                                                   |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| REF.                                                                              | FA 60 046 00                                                                                                            |                                                                                                                 |                                                                                                                   |
| CE                                                                                | EN 795:2012 Type B                                                                                                      |                                                                                                                 |                                                                                                                   |
|  | x1                                                                                                                      |                                                                                                                 |                                                                                                                   |
| MAT.                                                                              |  <b>INOX</b> Ø 8.0 mm<br>FA 60 006 10S |  70 mm<br>PES<br>FA 60 046 01 |  <b>STEEL</b><br>FA 50 301 23B |
| LG.                                                                               | 1.0 m<br>FA 60 006 10S                                                                                                  | /                                                                                                               | 0.8 m<br>FA 60 046 01                                                                                             |
| R (kN) / MBS (kN)                                                                 | 12 kN / 23 kN                                                                                                           |                                                                                                                 |                                                                                                                   |
|  | 1.40 KG                                                                                                                 |                                                                                                                 |                                                                                                                   |



**Nombre d'utilisateurs**  
 Number of users  
**Cantidad de usuarios**  
 Quantità di utilizzatori  
**Anzahl der Benutzer**

**R (kN) / MBS (kN)**

**Résistance statique (en kN) / Résistance à la rupture**  
 Static strength (in kN) / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**