



FA 40 909 XX/XXX

SKALA




55 cm
openable
protection
sleeve




EN 358 + EN 795 Type B + EN 795 Type C + EN 353-2 + EN 12841




protective sleeve at each end

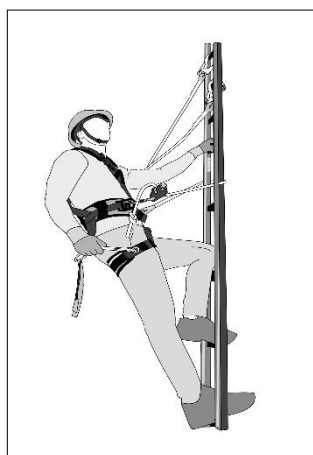

EN 358:2018

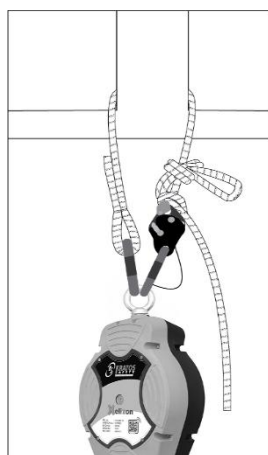

EN 795:2012 Type B

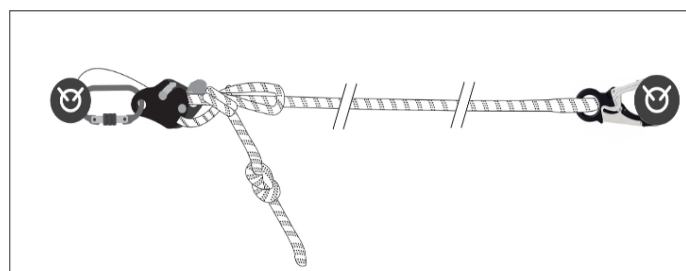

EN 795:2012 Type C

HS CODE
56090000
CARTON SIZE / PCS.
40 x 40 x 24 cm / 12
AET (UE) N° 2777/26522-02/E01-01
SATRA Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 40 909 20	FA 40 909 40	FA 40 909 100	FA 40 909 150	FA 40 909 250
CE	EN 358:2018, EN 795:2012 Type B & C, EN 12841:2006, EN 353-2:2002				
LG.	2.0 m	4.0 m	10.0 m	15.0 m	25.0 m
MAT.	 Polyamide 11 mm				
	 QUARTER / DOUBLE ACTION				
MAT. 					
	0.75 KG	0.77 KG	1.55 KG	2.10 KG	3.05 KG

MAT.		MAT. 
Matière	Matière connecteurs	Matière coulisseau
Material	Material of connectors	Material of rope grab
Material	Material de los conectores	Material de corredera
Materia	Materie connettori	Materia anticaduta scorrevole
Material	Material der Verbinder	Material des Gleitelements