





EASYSAFEWAY 1

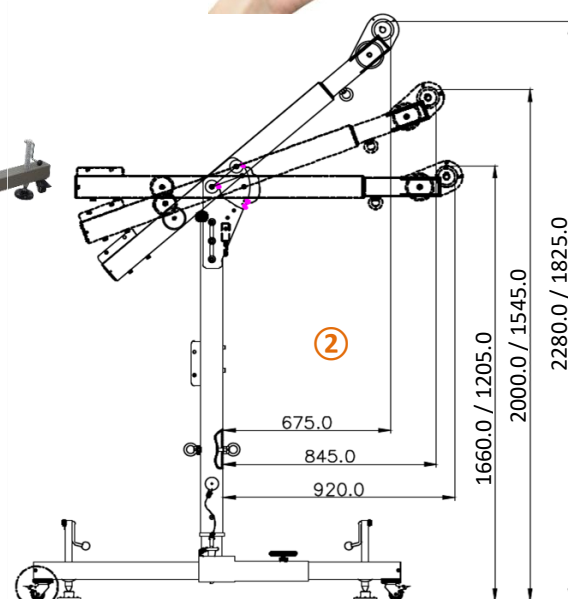

II2 G Exh IIC T6 Gb

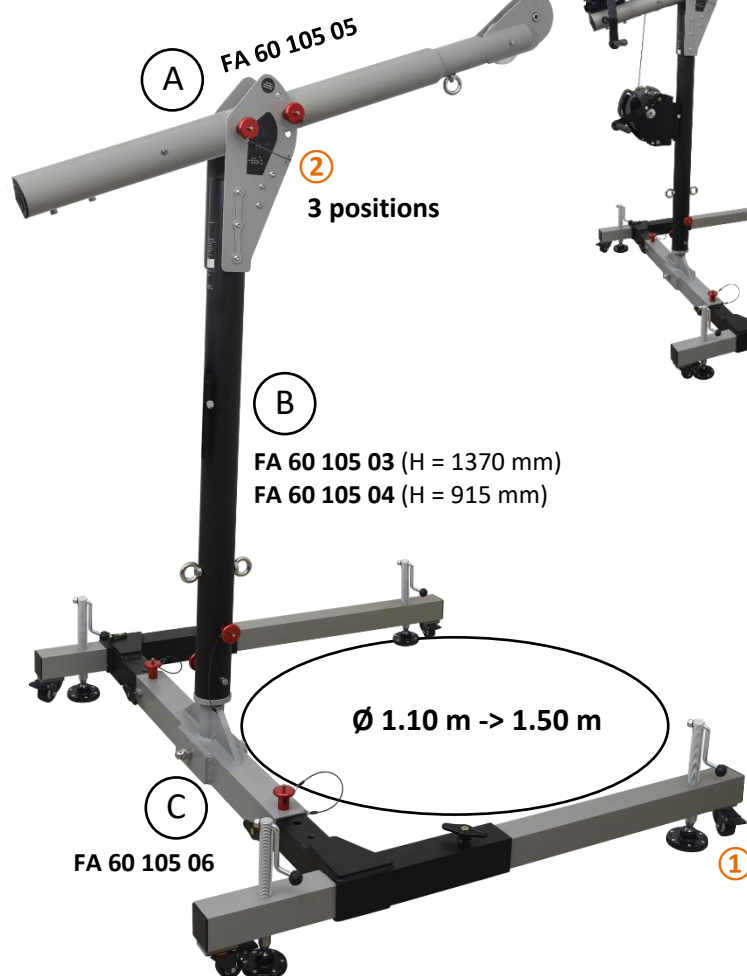

①



FA 60 105 00 =
FA 60 105 03
+ FA 60 105 05
+ FA 60 105 06

FA 60 105 07 =
FA 60 105 04
+ FA 60 105 05
+ FA 60 105 06

HS CODE

76169990

CARTON SIZE / PCS.

(A) FA 60 105 05 : 157 x 25 x 20 cm / 1 pc.

(B) FA 60 105 03 : 157 x 25 x 20 cm / 1 pc.

OR (B) FA 60 105 04 : 120 x 25 x 20 cm / 1 pc.

(C) FA 60 105 06 : 144 x 67 x 40 cm / 1 pc.

AET (UE) N°2777/16442-01/E01-02

Satra Technology Europe Ltd., N° 2777,

Bracetown Business Park, Clonee,

Dublin, D15YN2P, Ireland

MODULE D FI14/14003.01

SGS Fimko Oy, N°0598

Takomotie 8,

00380 HELSINKI, Finland

REF.	FA 60 105 00 FA 60 105 07		
CE	EN 795:2012 Type B		
	x1		
	500 KG		
MAT.			
DIM. $\updownarrow$ H	3 positions : 1.66 m / 2.00 m / 2.28 m 1.20 m / 1.54 m / 1.82 m		
R (kN) / MBS (kN)	12 kN / 21 kN		
	Min. 1,10 m / Max. 1,50 m		
+	(1) Machinery Directive + EN 1808 (2) FA 60 022 01/02/11/12/13 (2) FA 60 105 01 + FA 20 401 XX/FA 20 401 XXS (3) FA 60 105 02 + FA 60 003 XX/FA 60 003 XXS/FA 60 023 20/FA 60 023 20R EN 80079-36:2016 EN 80079-37:2016		
	62 KG (A) 11 KG + (B) 16 KG + (C) 35 KG		58,35 KG (A) 11 KG + (B) 12.35 KG + (C) 35 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Charge maxi admissible
Max. allowable load
Carga máxima admisible
Peso massimale
Zulässige Höchstlast

DIM. $\updownarrow$ H

Hauteur
Height
Altura
Altezza
Höhe



Empattement base en H
H-shaped wheelbase
Distancia entre ejes de base en H
Ingombro base a H
Standbreite Basis in H

R (kN) / MBS (kN)

+ (1)

+ (2)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

Point fort
Key feature
Ventaja principal
Punti forti
Produktvorteil

À utiliser avec
To be used with
Para usar con
Ad essere utilizzato con
Verwendet werden soll mit