






II 2 G Exh IIC T6 Gb

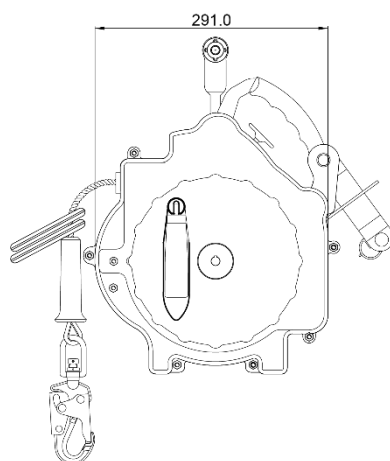

①

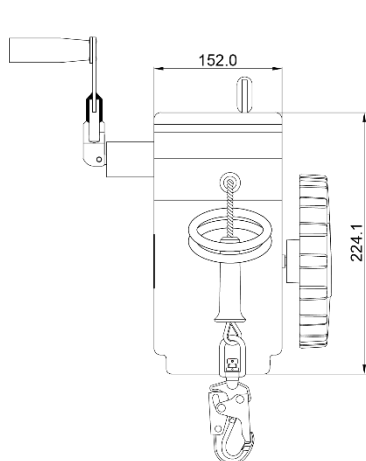

HS CODE
84798997
CARTON SIZE / PCS.
50 x 32 x 33 cm / 1
AET N°2777/23464-01/E02-01
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland
ACKNOWLEDGEMENT OF RECEIPT N°3975/1/2018 (ATEX)
Technická Inšpekcia, a.s. N°1354 Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika

REF.	FA 60 033 18
CE	PPE Regulation (EU) 2016/425 Annex II using EN 795 Type C TS 16415:2013 Type C
	x2
MAT. 	PA /  STEEL Ø 6.0 mm
R (kN) / MBS (kN)	13 kN / 23 kN
MAT. 	
DIM.	LG. MAXI 18 M
+	TENSION INDICATOR EN 80079-36:2016 EN 80079-37:2016
	14.39 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

+

Point fort
Key feature
Ventaja principal
Punti forti
Produktvorteil

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

TENSION INDICATOR

Équipé d'un témoin de tension
Has a tension indicator
Equipado con un testigo de tensión
Con indicatore di tensione
Mit Spannungsanzeige