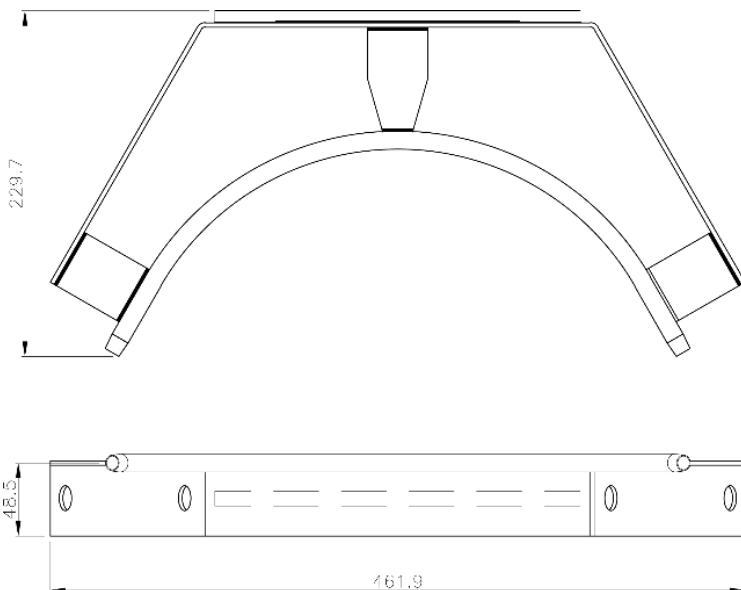





# IS LINE



<b>HS CODE</b>
83081000
<b>CARTON SIZE / PCS.</b>
60 x 40 x 48 cm / 8
<i>Test reports 160620/160952/170640/170639/180226 - Against EN 795:2012 &amp; CEN/TS 16415:2013 Type C</i>
<b>DolomitiCert Scarl</b> Zona Industriale Villanova 32013 LONGARONE (ITALIE)


REF.	FA 60 216 90
CE	EN 795:2012 Type C ; TS 16415 Type C
MAT.	
DIM.	461 x 229 x 48,5 mm
	1x M12
	0.81 KG
Sys.	<input checked="" type="checkbox"/> KS 4000 <input type="checkbox"/> KS 4000 MAX-S



**Nombre d'utilisateurs**  
Number of users  
**Cantidad de usuarios**  
Quantità di utilizzatori  
**Anzahl der Benutzer**

**R (kN) / MBS (kN)**

**Résistance statique (en kN) / Résistance à la rupture**  
Static strength / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
Resistenza statica (in kN) / Resistenza alla rottura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**



**Fixations à utiliser**  
Fasteners to use  
**Fijaciones que deben usarse**  
Elementi di fissaggio da utilizzare  
**Zu verwendende Befestigungen**

**Sys.**

**Système compatible**  
Comptible system  
**Sistema compatible**  
Sistema compatibile  
**Kompatibles system**