





C-LINE

FA 60 007 01




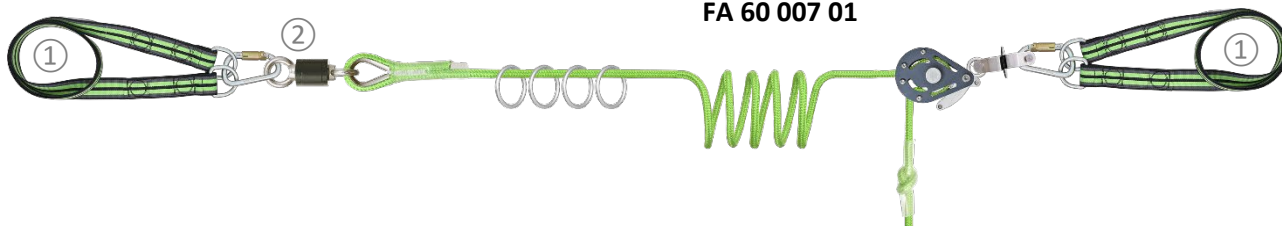


CROSS LINE 1


FA 60 007 02

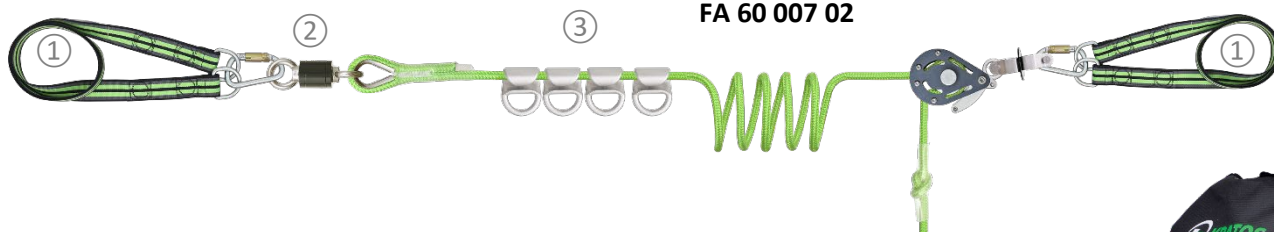

INCLUDED



Transport bag
included

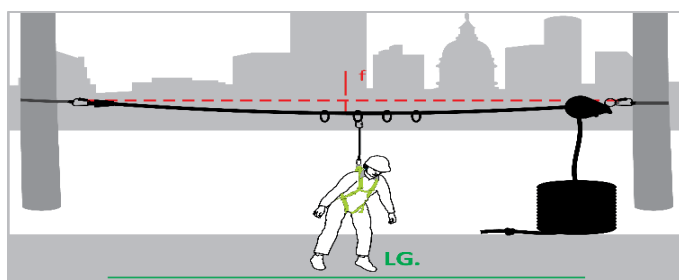

HS CODE
63079098
CARTON SIZE / PCS.
40 x 40 x 24 cm / 1
AET (UE) N°2777/13802-02/E01-01
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 007 01	FA 60 007 02
CE	PPE regulation (EU) 2016/425 Annex II using EN 795:2012, TS 16415:2013	
	x4	
MAT.	 16 mm Polyester	
R (kN) / MBS (kN)	21 kN / 23 kN	
MAT.  / 	 /  & 	
LG. / f MIN. → MAX.	5.0 m → 25.0 m / 1.2 m → 4.83 m	
+		
	11.64 KG	12.03 KG



R (kN) / MBS (kN)

Nombre d'utilisateurs

Number of users

Cantidad de usuarios

Quantità di utilizzatori

Anzahl der Benutzer

MAT.



Matière connecteur / tendeur
 Material of connector / tensioner
Material del conector / tensor
 Materia del connettore / tenditore
Material Verbinder / Spanner

Résistance statique (en kN) / Résistance à la rupture

Static strength / Minimum Breaking Strength

Resistencia estática (en kN) / Resistencia a la ruptura (en kN)

Resistenza statica (in kN) / Resistenza alla rottura (in kN)

Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

LG. / f MIN. MAX.

Longueur mini → maxi / Flèche mini → maxi

Min. → Max. length / Min. → Max. deflection

Longitud mínima → máxima / Flecha mínima → máxima

Lunghezza min. → max. / Flessione min. → max.

Länge min. → max. / Dirchhang min. → max.