






FA 70 016 00

+



FA 20 800 02

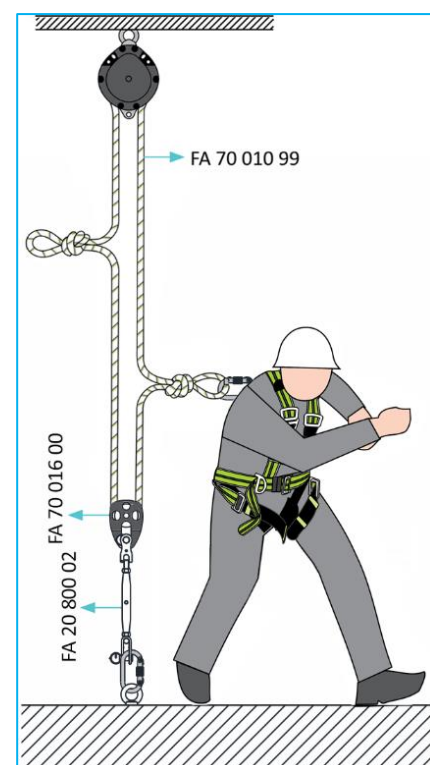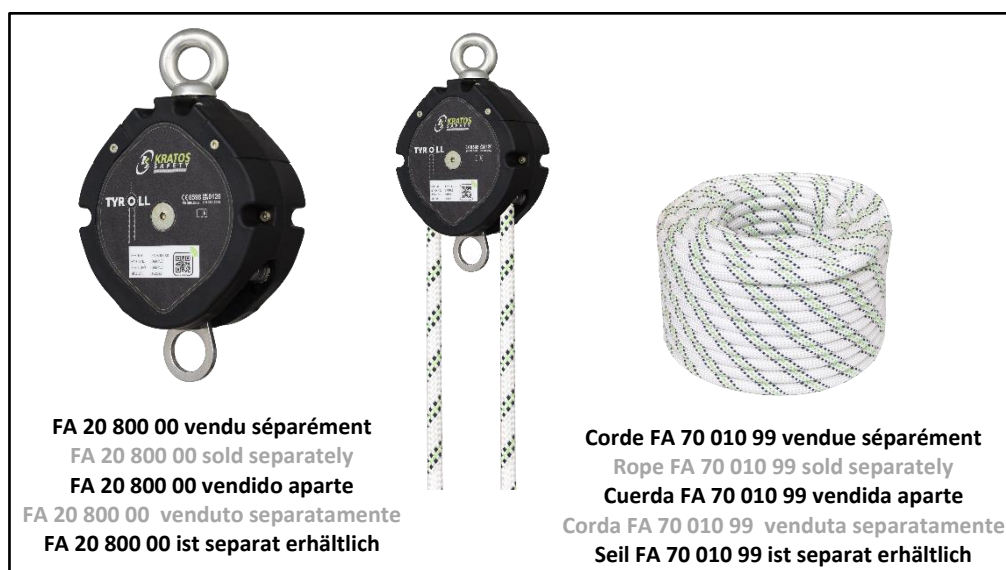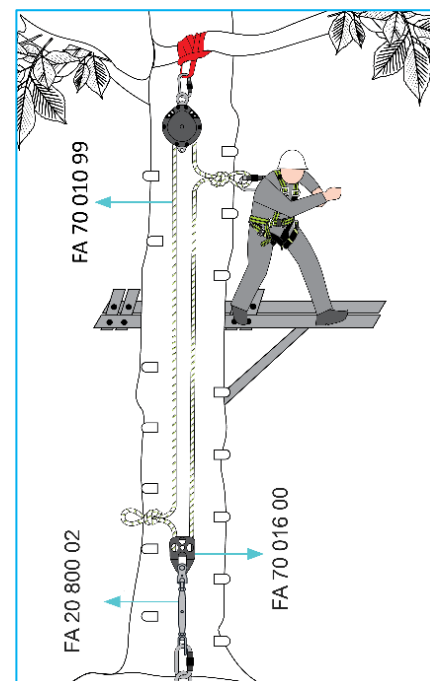









HS CODE

84835080

CARTON SIZE / PCS.

40 x 30 x 24 cm / 10

REF.	FA 70 016 00	FA 20 800 02
CE	EN 12278:2007	---
MAT.		
MAT. 	 \varnothing 45 mm	---
BEARING TYPE	DRY BEARING	---
MAT. 	PA PES \varnothing 9-16 mm	---
MBS (kN)/WL (kN)	40 kN / 10 kN	---
+	FA 20 800 00 + FA 70 010 99	
	0.25 KG	0.97 KG

MAT. 	BEARING TYPE	DRY BEARING	+
Matière et diamètre du réa Material and diameter of sheave Material y diámetro de la roldana Materiale e diámetro della gola Material, Durchmesser der Seilscheibe	Type de roulement Bearing type Tipo de rodamiento Tipo di cuscinetto Lagertyp	Roulement sur bague Dry bearing Rodamiento en anillo Cuscinetto a secco Rollenlager	À utiliser avec To be used with Para usar con Ad essere utilizzato con Verwendet werden soll mit
MBS (kN) / WL (kN) Résistance statique (en kN) / Résistance à la rupture Static strength / Minimum Breaking Strength Resistencia estática (en kN) / Resistencia a la ruptura (en kN) Resistenza statica (in kN) / Resistenza alla rottura (in kN) Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)	MAT.  Matière et diamètre de la corde à utiliser Material and diameter of the rope to use Material y diámetro de la cuerda que debe usarse Materiale e diametro della corda ad utilizzare Material und Durchmesser des zu verwendenden Seils		