


IN LOCK-2



II 2 G Exh IIC T6 Gb

34 cm

4 cm

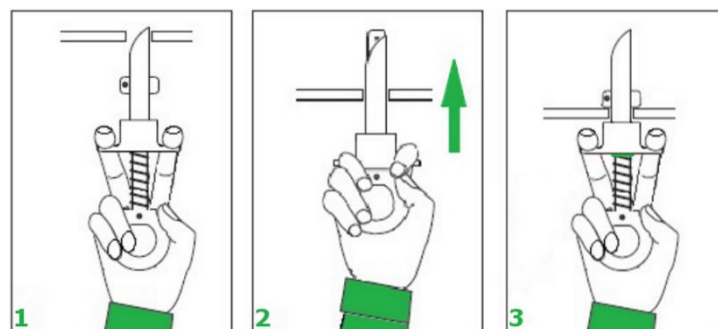

HS CODE

83081000

CARTON SIZE / PCS.

FA 60 019 00: 40 x 30 x 24 cm / 20**FA 60 019 01:** 60 x 40 x 24 cm / 15

AET (UE) N°2777/10795-03/E01-01

Satra Technology Europe Ltd., N° 2777,
 Bracetown Business Park, Clonee,
 Dublin, D15YN2P, Ireland

MODULE D IN14/14003.01


SGS Fimko Oy, N°0598
 Takomotie 8,
 00380 HELSINKI, Finland

AET (UKCA) N°AB0321/16000-01/E01-01

Satra Technology Centre, N°0321
 Wyndham Way, Telford Way, Kettering
 Northamptonshire, NN16 8SD, United Kingdom

MODULE D 11 IN14/14003

SGS United Kingdom Ltd., N°0120
 Unit 202B, Worle Parkway,
 Weston-super-Mare, BS22 6WA, United Kingdom


REF.	FA 60 019 00 FA 60 019 01
	EN 795:2012 Type B
	x1
MAT.	
R (kN) / MBS (kN)	12 kN / 23 kN
	Ø 22-23 mm
+	EN 80079-36:2016 EN 80079-37:2016
	0.55 KG 1.25 kg



Nombre d'utilisateurs
 Number of users
Cantidad de usuarios
 Quantità di utilizzatori
Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
 Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
 Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Dimensions de la structure d'accueil
 Dimensions of the receiving structure
Dimensiones de la estructura receptora
 Dimensioni della struttura ospitante
Abmessungen der Aufnahmestruktur