

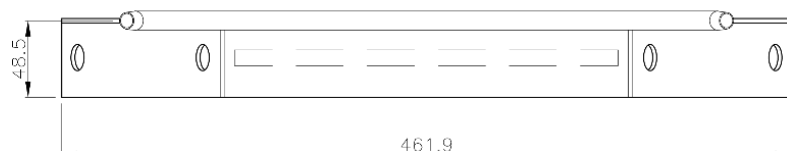


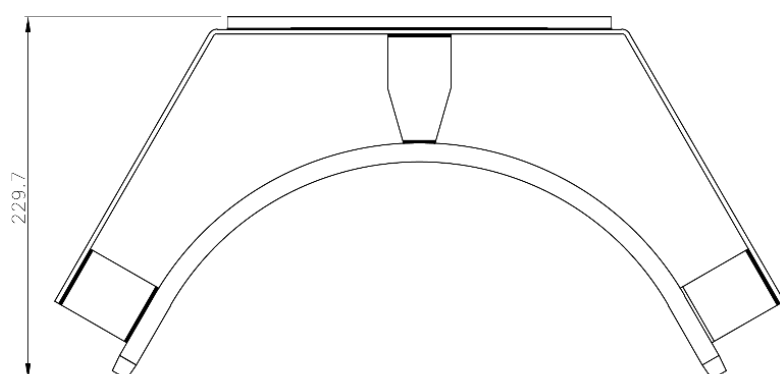

KS LINE



HS CODE
83081000
Carton size / UC
60 x 40 x 48 cm / 8
<i>Test reports 160620/160952/170640/170639/180226 - Against EN 795:2012 & CEN/TS 16415:2013 Type C</i>
DolomitiCert Scarl Zona Industriale Villanova 32013 LONGARONE (ITALIE)

REF.	FA 60 217 90
CE	EN 795:2012 Type C ; TS 16415 Type C
MAT.	
DIM.	461 x 229 x 48,5 mm
	2x M12
	1.00 KG
Sys.	☒ KS 4000 ☐ KS 4000 MAX-S



Nombre d'utilisateurs

Number of users

Cantidad de usuarios

Quantità di utilizzatori

Anzahl der Benutzer

R (kN) / MBS (kN)


Résistance statique (en kN) / Résistance à la rupture

Static strength / Minimum Breaking Strength

Resistencia estática (en kN) / Resistencia a la ruptura (en kN)

Resistenza statica (in kN) / Resistenza alla rottura (in kN)

Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Fixations à utiliser

Fasteners to use

Fijaciones que deben usarse

Elementi di fissaggio da utilizzare

Zu verwendende Befestigungen

Sys.

Système compatible

Comptible system

Sistema compatible

Sistema compatibile

Kompatibles system