

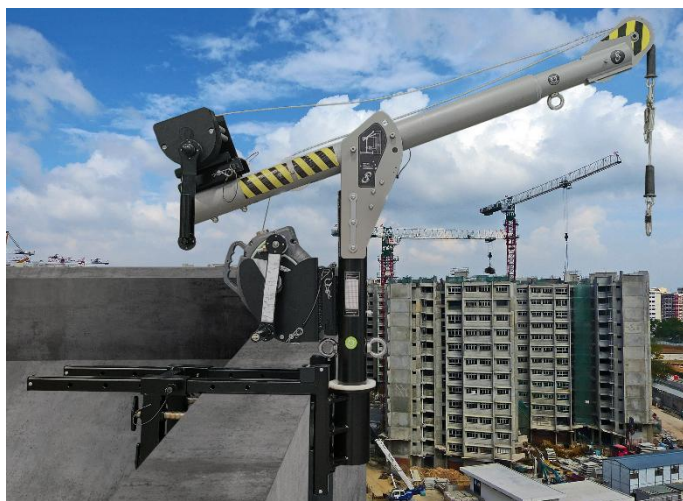
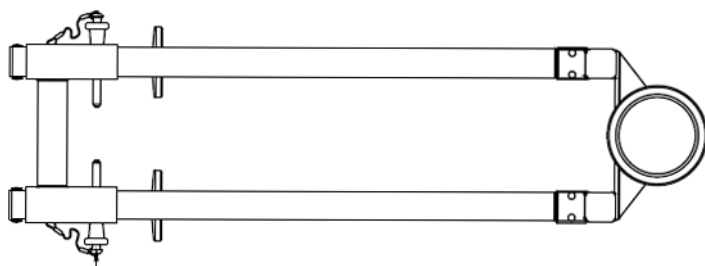
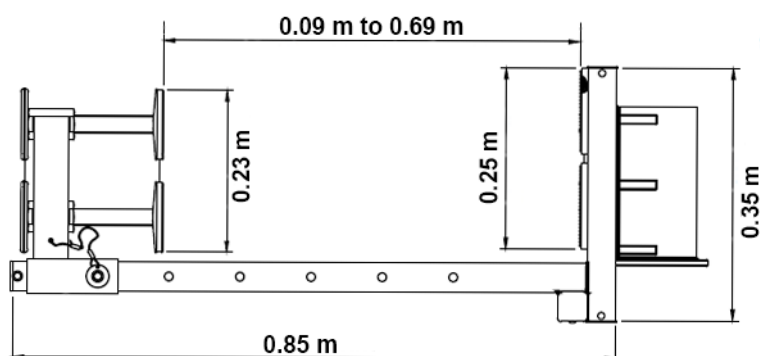


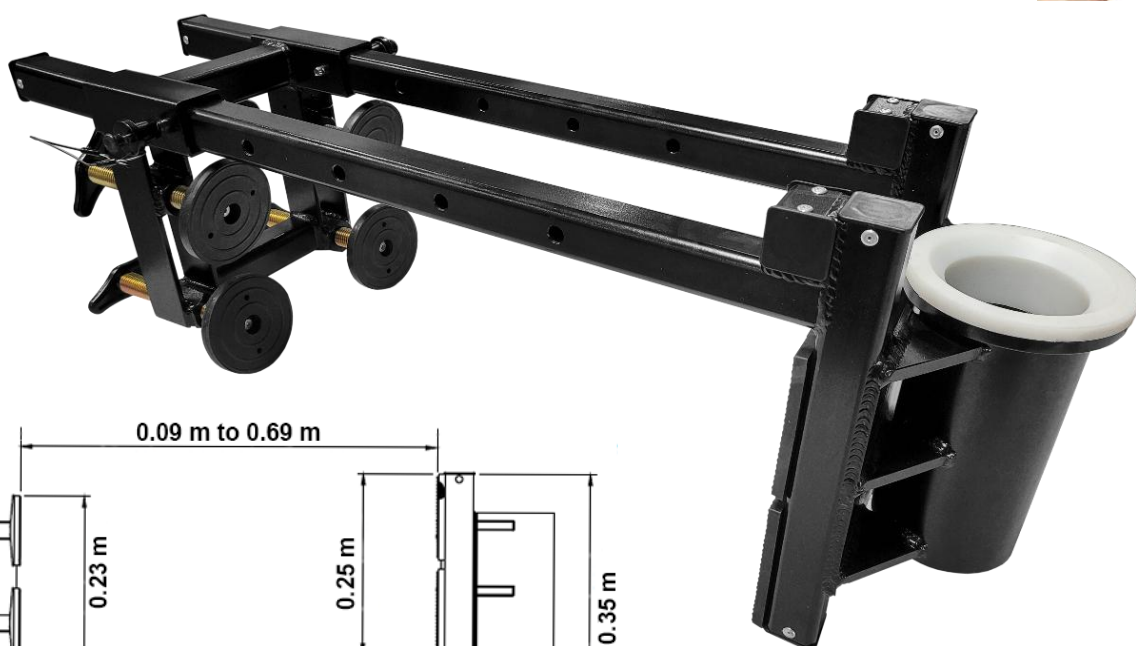

EASYSAFEWAY 4



HS CODE
73269098
CARTON SIZE / PCS.
119.5 x 36.8 x 59 cm / 1
AET (UE) N°2777/27038-01/E01-02
Satra Technology Europe Ltd., N° 2777, Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.01
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland

REF.	FA 60 108 00
CE	EN 795:2012 Type B
	x1
MAT.	
R (kN) / MBS (kN)	12 kN / 15 kN
	0.09 m → 0.69 m
+	FA 60 022 00, FA 60 105 03, FA 60 105 04, FA 60 105 06
	27.10 KG



Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer



Charge maxi admissible
Max. allowable load
Carga máxima admisible
Peso massimale
Zulässige Höchstlast

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
Static strength (kN) / Minimum Breaking Strength (kN)
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

+

À utiliser avec
To be used with
Para usar con
Ad essere utilizzato con
Verwendet werden soll mit